ULTRA SHORT THROW LASER PHOSPHOR **PROJECTOR**

ZH400UST



Spectacular 100" FullHD 1080p image from only 13" away





Combines laser phosphor technology with 4000 lumens and 100,000:1 contrast ratio to produce bright visuals and razor sharp text



PC-Free USB Media Player supports playback of video and audio files along with shared images and presentations



Full HD 1080p and extensive I/O connectivity with Dual HDMI featuring MHL, VGA-In, RJ-45 and 2x Audio-In



Powerful 10-Watt speakers enhance presentations and fill every room with loud crisp audio



Laser phosphor light source provides 20,000+ hours of light source expectancy



HDMI MHL port supports popular **HDMI** dongles including Optoma's HDCast Pro, Chromecast, FireTV & more



















The Optoma ZH400UST is equipped with laser phosphor display technology for state-of-the-art picture and color performance. The ZH400UST impresses with rich color and deep black levels that outperform traditional lampbased projectors, while the laser solid-state light source provides 20,000+ hours of life for a virtually maintenance-free operation.

With a throw ratio of .25, the ZH400UST can display a 100" 1080p image from only 13" away making it ideal for space constrained environments such as small classrooms, meeting rooms, boardrooms and digital signage applications. Allowing for presentations to transition from external sources seamlessly, the ZH400UST's PC-Free USB Media Player supports playback of video and audio files along with images and presentations shared directly from any USB device.

Featuring a powerful 10-watt speaker, the ZH400UST enhances presentations, videos and audio files by delivering crisp, robust audio. In addition, streaming and presenting is made easy with an MHL-powered HDMI port that supports popular dongles including Optoma's HDCast Pro and Amazon's FireTV. The USB port can also be used to power Optoma's WHD200 Wireless HDMI system or Google's Chromecast media dongle.

CONNECTIVITY (May require optional accessories)



Computers







3D Blu-ray/DVD Players



Camcorders







Apple TV®

Chromecast™

ULTRA SHORT THROW LASER PHOSPHOR PROJECTOR — ZH400UST


OPTICAL/TECHNICAL SPECIFICATIONS

Color Wheel3 Segment; Y/G/B Wheel Diameter 59mmNative Resolution1080p (1920x1080)Maximum Resolution1080p (1920x1080)Brightness4000 LumensContrast Ratio100,000:1 (dynamic black enabled)Displayable Colors1.7 Billion ColorsLamp Life and Type*Up to 20,000 hrsProjection MethodFront, rear, ceiling mount, table topKeystone Correction±40° VerticalVertical Lens ShiftN/AUniformity80%Offset120%±3%Aspect Ratio16:9 (native), 16:10, 4:3, AutoThrow Ratio0.25:1 (distance/width), ±5% VarianceProjection Distance17.7"-22.1" (0.45-0.56 m)Image Size85" - 100"Projection LensF=2.5-3.26, f=20.91 ~ 32.62 mm manual focusOptical ZoomFixed lensDigital ZoomYesAudio10W Mono SpeakerNoise Level30dB (ECO)Remote ControlFull Function RemoteOperating Temperature41-104°F (5-40°C), 85% max humidityPower SupplyAC input 90 - 264V, 50-60 HzPower Consumption335W (Bright), 225W (ECO)High AltitudeOperating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	1080P DMD
Maximum Resolution 1080p (1920x1080) Brightness 4000 Lumens Contrast Ratio 100,000:1 (dynamic black enabled) Displayable Colors 1.7 Billion Colors Lamp Life and Type* Up to 20,000 hrs Projection Method Front, rear, ceiling mount, table top Keystone Correction ±40° Vertical Vertical Lens Shift N/A Uniformity 80% Offset 120%±3% Aspect Ratio 16:9 (native), 16:10, 4:3, Auto Throw Ratio 0.25:1 (distance/width), ±5% Variance Projection Distance 17.7"-22.1" (0.45-0.56 m) Image Size 85" - 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41-104°F (5-40°C), 85% max humidity Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Brightness 4000 Lumens Contrast Ratio 100,000:1 (dynamic black enabled) Displayable Colors 1.7 Billion Colors Lamp Life and Type* Up to 20,000 hrs Projection Method Front, rear, ceiling mount, table top Keystone Correction ±40° Vertical Vertical Lens Shift N/A Uniformity 80% Offset 120%±3% Aspect Ratio 16:9 (native), 16:10, 4:3, Auto Throw Ratio 0.25:1 (distance/width), ±5% Variance Projection Distance 17.7"–22.1" (0.45–0.56 m) Image Size 85" - 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41–104°F (5–40°C), 85% max humidity Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Contrast Ratio Displayable Colors Lamp Life and Type* Projection Method Keystone Correction Vertical Lens Shift Uniformity May Offset Aspect Ratio Throw Ratio Projection Distance Projection Distance Tron', rear, ceiling mount, table top N/A Uniformity 80% Offset 120%±3% Aspect Ratio 16:9 (native), 16:10, 4:3, Auto Throw Ratio 0.25:1 (distance/width), ±5% Variance Projection Distance 17.7"-22.1" (0.45-0.56 m) Image Size 85" - 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Operating Temperature 41-104°F (5-40°C), 85% max humidity Power Consumption High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Displayable Colors Lamp Life and Type* Projection Method Front, rear, ceiling mount, table top Keystone Correction ±40° Vertical Vertical Lens Shift N/A Uniformity 80% Offset 120%±3% Aspect Ratio 16:9 (native), 16:10, 4:3, Auto Throw Ratio 0.25:1 (distance/width), ±5% Variance Projection Distance 17.7"-22.1" (0.45-0.56 m) Image Size 85" - 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Operating Temperature 41-104°F (5-40°C), 85% max humidity Power Consumption High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Lamp Life and Type* Up to 20,000 hrs Projection Method Front, rear, ceiling mount, table top Keystone Correction ±40° Vertical Vertical Lens Shift N/A Uniformity 80% Offset 120%±3% Aspect Ratio 16:9 (native), 16:10, 4:3, Auto Throw Ratio 0.25:1 (distance/width), ±5% Variance Projection Distance 17.7"−22.1" (0.45−0.56 m) Image Size 85" - 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41−104°F (5−40°C), 85% max humidity Power Supply AC input 90 − 264V, 50−60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Projection Method Front, rear, ceiling mount, table top Keystone Correction ±40° Vertical Vertical Lens Shift N/A Uniformity 80% Offset 120%±3% Aspect Ratio 16:9 (native), 16:10, 4:3, Auto Throw Ratio 0.25:1 (distance/width), ±5% Variance Projection Distance 17.7"−22.1" (0.45−0.56 m) Image Size 85" − 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41−104°F (5−40°C), 85% max humidity Power Supply AC input 90 − 264V, 50−60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Keystone Correction ±40° Vertical Vertical Lens Shift N/A Uniformity 80% Offset 120%±3% Aspect Ratio 16:9 (native), 16:10, 4:3, Auto Throw Ratio 0.25:1 (distance/width), ±5% Variance Projection Distance 17.7"-22.1" (0.45-0.56 m) Image Size 85" - 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41-104°F (5-40°C), 85% max humidity Power Supply AC input 90 - 264V, 50-60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude model	
Vertical Lens Shift N/A Uniformity 80% Offset 120%±3% Aspect Ratio 16:9 (native), 16:10, 4:3, Auto Throw Ratio 0.25:1 (distance/width), ±5% Variance Projection Distance 17.7"-22.1" (0.45-0.56 m) Image Size 85" - 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41-104°F (5-40°C), 85% max humidity Power Supply AC input 90 - 264V, 50-60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Uniformity 80% Offset 120%±3% Aspect Ratio 16:9 (native), 16:10, 4:3, Auto Throw Ratio 0.25:1 (distance/width), ±5% Variance Projection Distance 17.7"−22.1" (0.45−0.56 m) Image Size 85" - 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41−104°F (5−40°C), 85% max humidity Power Supply AC input 90 − 264V, 50−60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Offset 120%±3% Aspect Ratio 16:9 (native), 16:10, 4:3, Auto Throw Ratio 0.25:1 (distance/width), ±5% Variance Projection Distance 17.7"−22.1" (0.45−0.56 m) Image Size 85" - 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41−104°F (5−40°C), 85% max humidity Power Supply AC input 90 − 264V, 50−60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Aspect Ratio 16:9 (native), 16:10, 4:3, Auto Throw Ratio 0.25:1 (distance/width), ±5% Variance Projection Distance 17.7"− 22.1" (0.45−0.56 m) Image Size 85" − 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41−104°F (5−40°C), 85% max humidity Power Supply AC input 90 − 264V, 50−60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Throw Ratio 0.25:1 (distance/width), ±5% Variance Projection Distance 17.7"−22.1" (0.45−0.56 m) Image Size 85" - 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41−104°F (5−40°C), 85% max humidity Power Supply AC input 90 − 264V, 50−60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Projection Distance 17.7" – 22.1" (0.45 – 0.56 m) Image Size 85" - 100" Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41–104°F (5–40°C), 85% max humidity Power Supply AC input 90 – 264V, 50–60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Image Size	
Projection Lens F=2.5~ 3.26, f=20.91 ~ 32.62 mm manual focus Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41-104°F (5-40°C), 85% max humidity Power Supply AC input 90 - 264V, 50-60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Optical Zoom Fixed lens Digital Zoom Yes Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41–104°F (5–40°C), 85% max humidity Power Supply AC input 90 – 264V, 50–60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Noise Level 30dB (ECO)	S
Audio 10W Mono Speaker Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41–104°F (5–40°C), 85% max humidity Power Supply AC input 90 – 264V, 50–60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Noise Level 30dB (ECO) Remote Control Full Function Remote Operating Temperature 41–104°F (5–40°C), 85% max humidity Power Supply AC input 90 – 264V, 50–60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Remote Control Full Function Remote Operating Temperature 41–104°F (5–40°C), 85% max humidity Power Supply AC input 90 – 264V, 50–60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Operating Temperature 41–104°F (5–40°C), 85% max humidity Power Supply AC input 90 – 264V, 50–60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Power Supply AC input 90 – 264V, 50–60 Hz Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
Power Consumption 335W (Bright), 225W (ECO) High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
High Altitude Operating temperature at sea level up to 10000 (max); Must manually switch to high altitude mo	
(max); Must manually switch to high altitude mo	
5000 feet and above (using OSD menu) to main functionality.	de from

COMPATIBILITY SPECIFICATIONS		
PC Free USB Media Player and Office Document Viewer	Supports playback of video files, audio files, and viewing of Office Documents and PDF files via USB 2.0 and USB 3.0 Flash Disks and Drives	
PC Free USB Media Player Video Codecs and Containers	H.264, H.263, VC-1, MPEG-1/2/4, DIVX-3/4/5/6, XVID, WMV7/8, VP8,VP6, AVS, MKV	
PC Free USB Media Player Audio Codecs and Containers	MP3, WMA, OGG, FLAC, APE, ATRA	
PC Free USB Media Player Image formats	JPEG, GIF, BMP	
PC Free Office Document and PDF Viewer formats	Word Documents (.doc, .docx), Excel Spreadsheets (.xls, .xlsx), Powerpoint Presentations (.ppt, .pptx), Adobe Acrobat files (.pdf)	
Computer Compatibility	SVGA, VGA, SXGA, UXGA, XGA,WXGA, HD, Mac	
Video Input Compatibility	NTSC, PAL, SECAM, SDTV 480i/p, 576i/p, HDTV 720p(50/60Hz), 1080i(50/60Hz), 1080P(50/60Hz)	
3D Compatibility [†]	Supports all HDMI 1.4a mandatory 3D formats (Frame pack, side-by-side, top-bottom) and up converts frame rate from 60Hz to 120Hz or 24Hz to 144Hz (i.e. 60 or 72 frames per eye). 3D glasses are needed and are sold separately. Refer to user manual for details.	
Vertical Scan Rate	24~ 85 Hz (120Hz for 3D feature)	
Horizontal Scan Rate	15.375~91.146 KHz	
User Controls	Complete on-screen menu adjustment in 18 languages	
I/O Connection Ports	2xHDMI (with MHL), Composite Video, 2xAudio-In (3.5mm & RCA), Mic-In (3.5mm), VGA-Out, Audio-Out (3.5mm), RS232, RJ-45, 2xUSB-A (USB Power and PC Free USB Media Player), USB-B (Service only)	
Loop Through (Audio)	Yes	

PHYSICAL SPECIFICATIONS

Security	Kensington® Lock Port, security bar and keypad lock
Weight	12.3 lb
Dimensions (W x H x D)	15" x 5" x 12.5" (381 x 127 x 317.5mm)

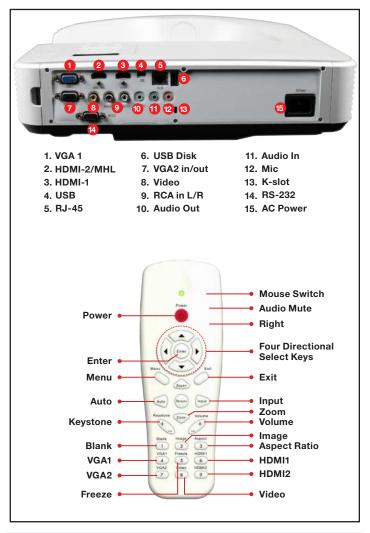

3-year or 20,000-hour light source warranty (whichever comes first), with 3-year Optoma Express

What's in the Box

ZH400UST, AC power cord, VGA to VGA cable, remote control, batteries for remote, multilingual CD-ROM user's manual, quick start card, and warranty card

Optional Accessories

Universal ceiling mount, DLP®Link™ 3D glasses, Wireless HDMI system, Remote

Accessory Part Numbers

Remote: BR-3080N Ceiling mount: OWM3000 DLP®Link™ 3D glasses: ZD302 Wireless HDMI system: WHD200

UPC 796435 44 049 7