

## PJD5353 Short Throw Portable XGA Projector

PJD5353



ViewSonic's PJD5353 short throw DLP projector is ideal for use in the office or on the campus. It delivers amazingly clear images with 2500 ANSI lumens, 3000:1 contrast ratio and XGA 1024x768 native solution. With a short throw lens, it offers large images from short distances – project a 50" image from only 2.3 feet away. The projector is packed with features like multiple PC and video inputs, HDMI for HD video signals, 120Hz/3D-ready for 3D applications and integrated speaker for multimedia. With ViewMatch™ technology adjusts color perfectly, so your presentations will be rich and vibrant regardless of any setting. This projector weighs only 5.7 lbs and is equipped with energy-saving Eco-mode which lowers power consumption and extends lamp life up to 6000 hours. The PJD5353 short throw XGA DLP projector delivers excellent performance and value for small business and education applications.

### 1 Short throw lens for large, stunning images in small places

The short throw lens enables large images to be projected from short distances in small rooms with space limitations. No distracting shadows on the projected image and no blinding lights in front of the presenters. A screen size of 50-inch is possible from just 2.3 feet.

### 2 BrilliantColor™ technology

Latest BrilliantColor technology delivers stunning all-digital clarity with life-like color, sharp graphics and outstanding video. The sophisticated 6-segment color wheel enhances the yellow color performance that is key to accurate and vivid color reproduction.

### 3 HDMI True digital connectivity

HDMI is the highest and future-proof video standard, guaranteed for true digital picture clarity.

### 4 Long Lamp Life 6000 hours

The new advanced lamp technology extends the lamp life up to 6000 hours\* and saves on maintenance costs.

### 5 3D-Ready Powered by DLP® Link™ Technology

Supports up to 120Hz frame rate.

### 6 Give Greener Presentations & Save

Use energy-saving Eco-mode to lower power consumption, extend lamp life and reduce noise. Filter-less design for saving maintenance costs and labor.

### 7 New slim design


With only 3.2 inch height and lightweight of 5.7 lbs, it's designed for portability and is easy to move from location to location.

# PJD5353 Short Throw Portable XGA Projector

**PJD5353**

## Specifications

<b>DISPLAY</b>	<p>Type: 0.55" Digital Micromirror Device (DLP™)  <b>Resolution:</b> XGA 1024x768 (Native)  <b>Lens:</b> Fixed Manual optical zoom / Manual optical focus  <b>Keystone:</b> Vertical digital keystone correction, +/- 40°  <b>Size:</b> 40" - 300" / 1.0m - 7.6m  <b>Throw Distance:</b> 1.6ft - 14.0ft / 0.5m - 4.3m  <b>Throw Ratio:</b> 0.68:1  <b>Lamp:</b> 180 watt  <b>Lamp Life (Normal / Eco-mode):</b> 5000 / 6000* hours  <b>Brightness:</b> 2,500 Lumens  <b>Contrast Ratio:</b> 2000:1 (typ) / 3000:1 (dynamic)  <b>Aspect Ratio:</b> 4.3 (native), 16:9, auto  <b>Color Depth:</b> 24 bits, 16.7M Colors (8+8+8)  <b>Color Wheel:</b> 6-Seg RGBCYW / 7200RPM</p>
<b>INPUT SIGNAL</b>	<p><b>Computer :</b> NTSC M (3.58 MHz), 4.43MHz, PAL (B, D, G, H, I, M, N, 60),  <b>and Video</b> SECAM (B, D, G, K, K1, L), SD 480i and 576i, ED 480p          and 576p, HD 720p, 1080i and 1080p  <b>Frequency:</b> Fh: 31 -100KHz, Fv: 50 -120Hz</p>
<b>COMPATIBILITY</b>	<p><b>PC:</b> VGA to UXGA  <b>MAC®:</b> Up to UXGA (scaled)  <b>RGB Input:</b> 15-pin mini D- sub (x2)  <b>RGB Output:</b> 15-pin mini D- sub  <b>Digital Input:</b> HDMI 1.3  <b>Component:</b> 15-pin mini D-sub (x2, shared with RGB)  <b>Composite Input:</b> RCA jack  <b>S-video Input:</b> 4-pin mini-DIN  <b>Audio Input:</b> 3.5mm mini jack  <b>Audio Output:</b> 3.5mm mini jack  <b>Control:</b> RS-232 (DB-9)  <b>USB:</b> Mini B (for mouse control firmware update)</p>
<b>AUDIO</b>	<p><b>Speaker:</b> 2W</p>
<b>POWER</b>	<p><b>Voltage:</b> 100 ~ 240VAC (Auto Switching), 50/60Hz (universal)  <b>Consumption:</b> 235W (typ) &lt;1W (stand-by mode)</p>
<b>CONTROLS</b>	<p><b>Basic:</b> Power, keystone/arrow keys, left/source, menu/exit, right/mode  <b>OSD:</b> <b>Picture:</b> Color Mode, Brightest PC, ViewMatch, Movie, User 1, User 2, White board, Black board, Green board, Brightness, Contrast, Color setting, User color, White intensity, Gamma, Aspect Ratio, Keystone, 3D sync, 3D invert  <b>Video / Audio:</b> Frequency, Tracking, H &amp; V position, Zoom, Video setting, Audio setting  <b>Setting (Basic):</b> Projector Projection, Menu Setting, Signal Type, Blank Screen, Test Pattern, Start up screen, Message, Auto source, Power saving, Green mode  <b>Option (Advanced):</b> Closed Caption, DCR, Password, Presentation Timer, High Altitude, Lamp setting, Factory Default  <b>Information:</b> Current System Status, Input Source, Resolution, H &amp; V Frequency, Lamp hours</p>
<b>OPERATING CONDITIONS</b>	<p><b>Temperature:</b> 32 F-104 F (0°C-40°C)  <b>Humidity:</b> 10%-80% (non-condensing)  <b>Altitude:</b> 0-6,000 ft (1,800m), operational up to 10,000 ft (3048m)</p>
<b>NOISE LEVEL</b>	<p><b>Normal / Eco-mode:</b> 32dB / 30dB</p>
<b>DIMENSIONS (WxHxD)</b>	<p><b>Physical:</b> 11.2" x 3.2" x 9.2" (in) / 294 x 82 x 234 (mm)  <b>Packaging:</b> 13.0" x 13.0" x 5.5" (in) / 330 x 330 x 140 (mm)</p>
<b>WEIGHT</b>	<p><b>Net:</b> 5.7 lb. (2.6kg)  <b>Gross:</b> 7.5 lb. (3.4kg)</p>
<b>REGULATIONS</b>	<p>RoHS, CB, CCC, PSB, C-tick, KC, SASO, CE, GOST-R, Ukr, Erp, SVHC list &amp; REACH DoC, UL, FCC(including ICES-003), cUL/ CSA, Argen, NOM</p>
<b>WARRANTY</b>	<p>3-year limited warranty on parts, 1-year limited warranty on lamp, 1st year Express Exchange® service.</p>

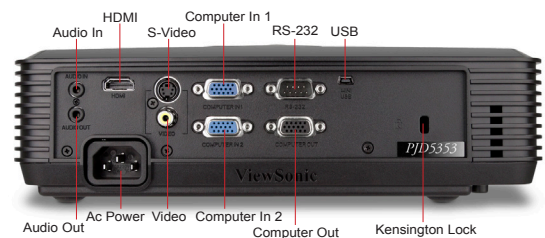

## Optinal Accessories

- > Replacement Lamp RLC-072
- > Short Throw Wall Mount Kit WMK-027
- > Wireless Presentation Gateway WPG-360
- > 3D HD Video Processor VP3D1
- > 3D Active Shutter Glasses PGD-250
- > Soft Case PJ-CASE-001
- > Extended 5-year warranty PRJ-EW-0702

Projection Distance		Screen Size (4:3)	
Feet	Meters	Inches	Meters
1.6	0.5	40	1.02
2.6	0.8	60	1.52
3.6	1.1	80	2.03
6.9	2.1	150	3.81
9.2	2.8	200	5.08
11.5	3.5	250	6.35
14.0	4.3	300	7.62

## Package Contents

ViewSonic PJD5353 projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

\*Lamp life may vary based on actual usage and other factors. Specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies, DLP® and DLP logo are registered trademarks of Texas Instruments and BrilliantColor™ is a trademark of Texas Instruments. Copyright © 2011 ViewSonic Corporation. All rights reserved. [15859-00B-10/11] PJD5353