

Embrace Network World with Smart design



PJD6352LS



3,200 Lumen XGA Short Throw with Cable Management Hood LightStream Projector

The ViewSonic LightStream™ PJD6352LS networkable short throw projector features 3,200 lumens, native XGA 1024x768 resolution, an intuitive, user-friendly design and a sleek white chassis. Exclusive SuperColor™ 6-Segment Color Wheel maximizes color saturation and brightness for true-to-life image projection in any light, while SonicExpert™, ViewSonic's

PJD6352LS

proprietary sound enhancement technology, powers a 10W speaker to deliver incredibly clear and audible sound. PortAll - a neatly designed enclosed HDMI/MHL connection compartment, supports streaming media from wireless HDMI dongles or MHL connectors, while a cable management hood connects onto the back of the projector and eliminates unsightly cable clutter. A 0.61 short throw lens offers large projection image for smaller rooms. With HV keystone, corner adjustment, and easy network management, the PJD6352LS provides flexible setup. Designed with smarter features and extensive connectivity, the networkable short throw PJD6352LS is ideal for use in education and corporate environments.

SuperColor™: Best in Class Color Accuracy

ViewSonic's proprietary SuperColor™ Technology offers a wider color range than conventional DLP projectors for true-to-life color performance in any light. SuperColor™ 6-Segment Color Wheel maximizes brightness Increased by 15% or more with the highest color saturation over others in the same class.



Short Throw

Options for large projections in small places

The short throw lens enables large images to be projected from short distances in small rooms. This means there are no distracting shadows on the projected image, and no blinding lights in the eyes of presenters.



PortAll: Secure MHL/HDMI Port

Enjoy high-definition multimedia to the furthest extent

The HDMI/MHL "PortAll", converts LightStream projector into smart TV by streaming multimedia such as movies, music, and games from smartphones or tablet PCs. Smartphone users can play Full HD 1080p video on a large than 100" screen over infinite media while charging their phones. Millions of online entertainment contents await you.



Embrace Network World with Smart design

PJD6352LS

Network Manager Easy Central Management System

Administrators can sit in front of PC and maintain up to 256 LightStream projectors remotely through RS232, USB, LAN IP or VGA/DVI/HDMI interfaces. ViewSonic LightStream projector is equipped with a complete built-in network control system which includes Crestron RoomView® network management software, AMX certification and industry standard PJ-Link. Together, they offer network administrators an effortless centralized control of up to 256 projectors with an advanced, real-time alert system that sends status updates regarding power, lamp life and unit presence to simplify maintenance efforts. This network control software is an efficient and easy-to-maintain system that is ideally suited for educational institutes.



Smart Design

High Unsightly Cables

The cable management hood connects onto the back of the projector and eliminates unsightly cable clutter. The seamless design gives the projector a clean look without wires and I/O ports exposed in the rear, and provides additional storage space for the remote control to avoid misplacement. An easy-access top lamp door enables simple lamp maintenance and replacement.

Easy Access Lamp

An easy-access top lamp door enables simple lamp maintenance and replacement.



PJD6352LS

SonicExpert™ Technology

Clear, comfortable, and louder sound over same-class projectors

Following a groundbreaking proprietary speaker transducer and chamber re-design, LightStream projectors deliver full-range sound 20Hz – 20KHz for presentations or off-the-clock home entertainment. The compact speaker takes pride in quality sound with best-fit Sound Response Curve, and high efficiency of transferring electric power to sound power. They sound stronger, offering more concentration, letting sound travel farther. The 10-watt Cube speaker is powerful enough to fill your meeting room with wall-to-wall sound – an improvement over the speakers of competing products in the same class.



Dual 3D Blu-ray Ready HDMI Inputs

Amazing 3D visual effects

Designed with two HDMI ports, this projector can display 3D images directly from 3D Blu-ray players—perfect for connecting to any HDMI-enabled device.



07272015

Embrace Network World with Smart design

PJD6352LS

Color Mode Best view modes

Providing 5 view modes for different scenarios, users can choose one fit mode at once for best view according to the projection environment. These 5 modes are: **Brightest Mode**: for environments where extra-high brightness is required; **Dynamic Mode**: for presentations under daylight environment and text content; **Standard Mode**: for matching PC or NB color; **ViewMatch Mode**: for general viewing; **Movie Mode**: for watching movies with better saturation in a dark environment.




Do It All with a Single Remote Control

A programmable hotkey “MyButton” can be configured to launch the most commonly used functions. A single remote control can also control up to eight projectors in the same venue. A Free vRemote app also allows users to control a projector via a mobile device.



Horizontal and Vertical Keystone + Corner Adjustment

Horizontal and vertical keystone correction and a corner adjustment feature eliminate crooked and distorted images for a perfectly proportioned picture every time.

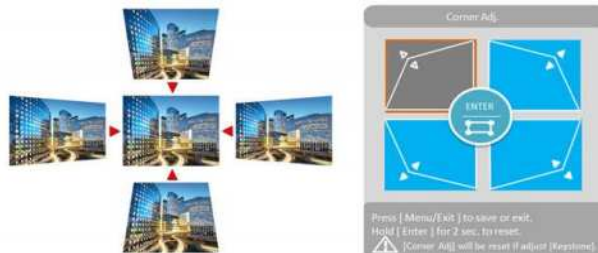

PJD6352LS



Technical Specifications

| | | |
|----------------------|---------------------|---|
| Display | Resolution | 1024x768 |
| | Lens | Optical Zoom:Fixed; Digital Zoom: 0.8X~2.0X |
| | Size | 50 - 250 inch |
| | Throw Distance | 0.6m - 3.1m |
| | Throw Ratio | 0.6 |
| | Lamp | 210W |
| | Brightness | 3200 ANSI Lumens |
| | Contrast Ratio | 22,000:1 (DynamicEco Mode) |
| | Keystone Correction | Vertical: +30~-30°, (Manual); Horizontal: +30~-30°, (Manual) |
| | Aspect Ratio | 4:3 |
| | Color Depth | 1.07 Billion Colors (30 bits per color) |
| | Optical Offset | 130 % +/-5% |
| | Audio | Speakers |
| Input Signal | Video | NTSC: NTSC M (3.58 MHz), 4.43MHz; PAL: PAL (B, D, G, H, I, M, N, 60); SECAM: SECAM (B, D, G, K, K1, L); SD: 480i and 576i; ED: 480p and 576p; HD: 720p,1080i, 1080p |
| | Frequency | Fh: 15-102KHz; Fv: 23-120Hz |
| Compatibility | PC | 1024x768@60Hz (native) |
| | Mac | 1024x768@60Hz (native) |
| Connector | RGB Input | VGA Input : x2 |
| | RGB Output | VGA Output: x1 |

07272015

PJD6352LS

| | | |
|-----------------------------|-----------------|--|
| | Composite Video | RCA-1 x1 |
| | S Video | Mini-Din 4 pin x1 |
| | Component Video | Share with VGA (x2) |
| | Digital | HDMI 1.4 x 1 / HDMI(MHL2.0)x1 |
| | Audio | In: 3.5mm Mini-Mono Jack x2; out: 3.5mm Mini-Mono Jack (x1) Microphone : Share with Audio in 2 connector |
| | Control | RS232 x1 (DB-9)(Wired remote function) |
| | USB | Mini USB x1 (For Mouse control & firmware upgrade) |
| Power | Voltage | 100~240Vac 50/60Hz (Auto Switching) |
| | Consumption | 330W (Max.) |
| Operating Conditions | Temperature | 0°~40°C / 32°~104°F |
| | Humidity | 10~90%, Non-Condensation |
| Dimensions | Physical | 316mm (width) x 103.7mm (height) x 228mm (depth) |
| Weight | Net | 2.6 kg |
| Regulations | | CB, TUV-GS, UL/cUL, FCC (including ICES-003), CE,C-Tick, Mexico Energy test/Registration, EAC, UkrSEPRO/EMC DOC, UL COC, TUV-S, Mark(Argentina), PSB, KCC, KC, SASO, CCC, WEEE, RoHS, REACH, SVHC, ErP |
| Package Contents | | Power Cord, 1.8m/VGA Cable, 1.8m / Remote Control with AAA Batteries /Quick Start Guide (one sheet version)/ ViewSonic CD Wizard (w User Manual) |

07272015