


KEY FEATURES: Model LC-XG110

- 2700 ANSI Lumens, at a 700:1 contrast ratio.
- Extremely quiet operation: fan noise as low as 31 dBA in Eco-mode.
- 3 panel LCD imaging for rich, color saturated visuals.
- Weighs only 17.2 lb! Compact and easy to carry and store.
- True XGA resolution. SXGA~VGA compatible. Two data inputs.
- Smart data compression / expansion, and video scaling.
- Power zoom & focus. Power lens shift. Digital keystone correction.
- Optional WideAngle & Telephoto Lenses. Quick Lens Change System.
- Wireless remote with mouse and Laser pointer. 7X digital zoom.
- Accepts DVD & HDTV Component Video, plus Composite, and S-Video Input.
- Displays all video color standards, in both 4:3 and 16:9 aspect ratio.
- Enhanced progressive scan up to 1080i, and 2-3 pulldown support.
- Optional Media Card Imager and Wireless Imager Attachments.
- 3 Year* Projector Warranty!

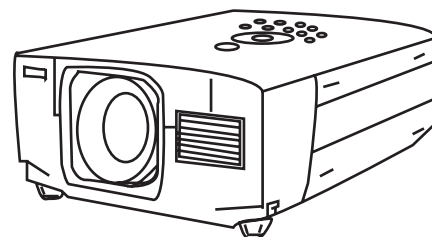

LC-XG110

Included Accessories: Owner's Manual. AC Power Cord. Lens Cover. HD15 (VGA-type) Computer Input Cable. DVI-I ~ HD15 Adapter.

Wireless Remote Control With Mouse and Laser Pointer & Batteries (AA x 2). Mouse cable for computer USB, Serial RS-232. Dust cover

Optional Accessories: Replacement Lamp. DVI-I~HD15 (VGA) Input Cable. Luggage Style Carry Case with Wheels and Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Mouse Extension Cable for Control Port. Media Card Imager (Compact Flash Computerless Slide Show System). Wireless Imager (Wi-Fi Content Delivery and Projector Control System). Wideangle and Telephoto Lenses. Eztrol Local Control. NPC-1 Network Control. Pj-to NetDirector.

SPECIFICATIONS: Model LC-XG110

Screen Brightness	2700 ANSI Lumens / 2200 in Eco-Mode	Computer: Inputs	1. Computer 1 HD15 x 1 data, Audio: Stereo: MiniStereo x 1 (L&R)
Illumination Uniformity	90%	2. Computer 2	DVI-I data, Audio: Stereo MiniStereo x 1 (L&R)
Size of Color Palette	16.7 Million	Computer: Monitor Output	HD15 x 1
Contrast Ratio	700:1 (Full ON/OFF)	Video: System Compatibility	NTSC/PAL/SECAM/NTSC 4.43/PAL-M&N
Horizontal Resolution	800 TV Lines	Video: HDTV Compatability	480i/p, 575i/p, 720p, 1035i, 1080i, -50/60
Projection Lamp	250W UHP / operated at 200W in Eco-Mode	Video: Formats Supported	4:3, 16:9
Estimated Lamp Life	2000 Hours	Video: Image Resizing	Video Scaling Technology
Imaging System	0.99" PolySilicon active matrix TFT Panels x 3	Video: Systems	Composite, S-Video, Component (Y,Pb/Cb, Pr/Cr)
Screen Pixels	1024 x 768 in stripe configuration	Video: Input Channels	1
Total Pixels	2,359,296 ((1024 x 768) x 3)	Video: Inputs	RCA x 1 Composite, S-Video x 1, RCA x 3 Component (Y,Pb/Cb, Pr/Cr) Audio: RCA x 2 (L&R Stereo)
Lens Type	Power Zoom and Focus	Audio Amplifier	Stereo 2 Watts RMS
Lens Specs	Speed: f:1.7~2.1; FL: 1.34~1.73 in. (34~44 mm)	Audio: Built in Speakers	Stereo: 1.8 in. (4.5cm.) x 2
Lens Ratios	Zoom Max:Min: 1.3:1; Throw:Width 1.69~2.19:1	Audio: Speaker Output	(Stereo) MiniStereo x 1 (8 Ohm)
Image Diagonal	30~300 in. (76.2~762cm)	Fan Noise	36 dBA / 31 dBA in Eco-Mode
Image Width	2~20 ft. (0.61~6.1 m.)	Size (HxWxD)	6.4 x 11.9 x 16.8 in. (161.7 x 301.8 x 425.9 mm.)
Throw Distance	3.4~43.7 ft. (1.04m~13.32 m.)		includes legs 0.8" (20.7mm) and lens cover 0.3" (7.1mm)
Front Elevation / Maximum Tilt	up to 10.0° up / +/- 20°	Weight	17.2 lb. (7.8kg)
Anti Keystone	Power Lens Shift, Ratio (Top:Bottom) 10:0~1:1	Packaged Size (HxWxD)	13.3 x 18.0 x 24.7 in. (337 x 456 x 626 mm.)
Vertical Keystone Correction	Digital: up to 30° up or down	Packaged Weight	27.4 lb. (12.4 kg.)
Horizontal Keystone Correction	Digital: up to 10° left or right	Power Requirements	100-240V AC, 50/60Hz
Scanning Frequency	Auto: H Sync.: 15-100kHz; V Sync.: 50-100Hz	Power Consumption	350W (in Normal mode)
Dot Clock	140 MHz	Heat	1195 BTU/hr. (301 Kcal/hr.) in Normal mode
Image Orientation	Normal, Reversed, Inverted	Power Cord	10' (3M) Type 3, Detachable
Local Control / Power Management	Full Function / Auto Shut-Off	Safety Compliance	UL, Listed
Remote Proj & Mouse Control	Wireless with Laser Pointer x 1	Security Facilities	Kensington® Security Slot
Control Ports	Mouse: USB x 1; Mouse / RS-232C: Mini DIN 8 Pin x 1	Operating Temperature	41~95°F (5~35°C)
Computer: Native Resolution	1024 x 768 (XGA)	User Maintenance	Clean Air Filter, Replace Lamp
Computer: Compatibility	SXGA, XGA, SVGA, VGA, MAC	Warranty Projector	3 Yr/6000Hr *(Parts/Labor to Correct Defects)
Computer: Formats	1280x1024, 1024x768, 800x600, 640x480	Warranty Lamp	90 Days (Failed Lamp Replaced Pro Rata)
Computer: Image Sizing	Normal, or Smart Compressed, or Expanded		* Which ever occurs first
Computer: Input Channels	2		

Caution! Laser Radiation – Do not stare into beam. Max. Output: 1 mW. Wave Length: 660 +/- 20 nm. Class II Laser Product.