

TENTATIVE

CP-X205



BUSINESS PROJECTOR

The portable CP-X205 is designed for both business and educational use. With a brightness of 2200 Lumens this projector can be used in a variety of light and dark environments. The CPX205 can be kept secure with a comprehensive range of security features to prevent theft, these include multiple pin - locks and a transition detector.


- 2200 ANSI Lumens with Optical Zoom
- Full Connectivity
- Quick Start and Instant Off
- Auto Vertical Keystone
- Input Source Naming
- My Button
- 7W Mono Speaker
- Whiteboard Mode and Blackboard Mode
- Anti Theft Features:
 - Transition Detector
 - MyScreen Lock
 - Security Bar
 - Pin-lock



HITACHI
Inspire the Next

CP-X205

TENTATIVE

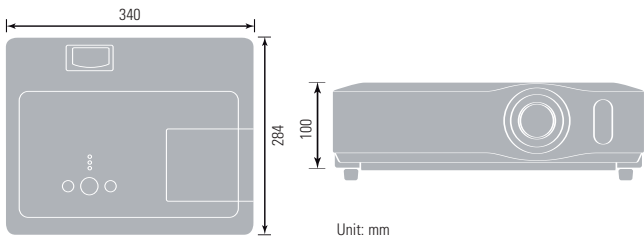

Unit: mm

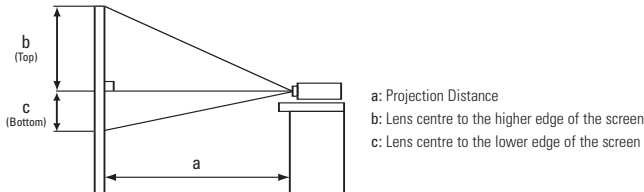


Image Size 4:3

Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
40" (1.0)	1.2	1.4	55	6
60" (1.5)	1.8	2.2	82	9
100" (2.5)	3.0	3.6	137	15
150" (3.8)	4.6	5.5	206	23
200" (5.1)	6.1	7.3	274	30
300" (7.6)	9.1	11	411	46

CP-X205 Technical Specifications

OPTICAL

LCD Panel	0.63" P-Si TFT x 3
Resolution	XGA: 1024 dots x 768 lines
Brightness	Normal Mode Whisper Mode
	2200 ANSI Lumens 1500 ANSI Lumens
Contrast Ratio	500:1 (typ)
Lens	F1.7-1.9 (f=19.5-23.4mm) Manual Focus, Manual Zoom x 1.2
Lamp	220W UHB
Lamp Life	2000 (normal)/3000 (whisper)
Projection Distance	0.9 - 11.0m
Distance to Width Ratio (:1)	1.5 (WIDE), 1.8 (TELE)
Diagonal Display Size	30-300" (60"@1.8m, Wide)
Number of Colour	8 Bit/colour, 16.7M colours
Keystone Correction	9:1upward shift, fixed

COMPATIBILITY

Computer Compatibility	IBM Compatible VGA, SVGA, XGA, SXGA/SXGA+, UXGA Capability, MAC 13", MAC 16" (Pixelworks chip)
Video Compatibility	NTSC/PAL(-BGDHI)/SECAM/PAL-M,N/NTSC4.43 SDTV: 525i(480i), 525p(480p), 625i(576i) HDTV: 750p (720p@50/60Hz), 1125i(1080i@50/60Hz)
Plug & Play	DCC2B
Frequency Range	FV 56-120Hz, FH 31.5-106kHz

FEATURES

Speakers	7W Mono
Other	Freeze, Magnifying, Blank, Auto adjustment, Search, Page UP&DOWN (for USB mouse function), Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction, Auto V keystone +/- 30 degrees (@XGA 60Hz), MyScreen, My Memory, My Button, blackboard/whiteboard mode, input source naming (english), resolution setting etc. Easy Lamp replace from Top, Air Filter on side, Serial Number label on side, Quick ON (4 sec), Direct ON, Direct Off, Security Bar, PIN Lock, MyScreen PIN lock, Keypad Lock, Kensington slot, Transition Detector
OSD Languages	MENU : 17 Language

CONNECTIONS

Computer Input	15-pin Mini D-sub x 2
Computer Output	15-pin Mini D-sub x 1
Video Input	RCA Jack x 1 S-Video Jack x 1
Audio Input	RCA Jack x 3 for Component Stereo Mini Jack x 2 RCA (L/R) x 1 pair (Selectable on OSD)
Audio Output	Stereo Mini Jack x 1
Control and Mouse	9-pin D-sub x 1 for RS232 control USB type B x 1 for mouse control
Networking	Controlling & Monitoring, WEB control, e-shot, scheduling function (RJ-45)

POWER

Power Supply	AC90 - 132 / 198 - 264 Auto Switching
Power Consumption	TBC

PHYSICAL

Dimensions (W x H x D)	340 x 100 x 284mm (excluding feet and extrusions)
Weight	3.5kg (Target)/7.8lbs
Noise Level	35dB/29dB
Air Filter	MU04951

MISCELLANEOUS

Lamp indicator light, Power light, Ceiling Mount image, Rear Projection Image

CERTIFICATION

UL60950/C-UL, FCC Part 15 Class B, 'CE, AS/NZS CISPR22 Class B

ACCESSORIES SUPPLIED

Remote Control with batteries, Computer Cable, Power Cord, User Manual (detail & concise), Softcase, Lens Cap (& strap), Security Label, AV cable

OPTIONAL ACCESSORIES

Replacement Lamp	DT00841
------------------	---------

Image Size 16:9

Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
40" (1.0)	1.3	1.6	51	-2
60" (1.5)	2	2.4	77	-2
100" (2.5)	3.3	4	129	-4
150" (3.8)	4.9	6	193	-6
200" (5.1)	6.6	8	257	-8
300" (7.6)	9.9	12	386	-12